




ITW Construction Products Italy S.r.l.
 Viale Regione Veneto 5, 35127 Padova - Italy
 Ph. +39 041.51.35.511
 info@itw-italy.com - www.elematic.it

POLYESTER BRAIDED SLEEVES

Scheda Tecnica aggiornata al 22.09.2016 / pag. 1 di 1

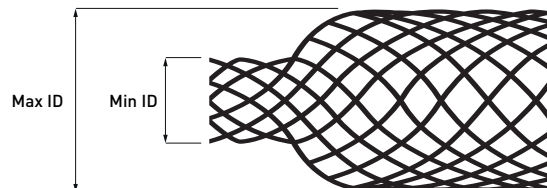

FEATURES

Extreme easy insertion
 Good chemical resistance
 Very resistant against abrasion
 Good wear resistance

VERSIONS

- Black
- Grey

PACKAGING

Reel

MATERIALS

PET

DIMENSIONS		PACKAGING
Minimum ID (NOM)	Max ID (NOM)	Reel
mm	mm	m
6	12	100
8	15	100
10	18	100
12	22	50
15	25	50
18	28	50
20	30	50
25	38	50
30	49	50
40	60	50

FIELD OF USE

Continuous operating temperature:
 -40°C ÷ +150°C

APPROVALS / CERTIFICATIONS

DIN 5510
 FMVSS 302
 EN 45545-2

TECHNICAL PROPERTIES			
Description	Test method	Typical value	UM
Continuous temperature of use	-	-40/150	°C
Short term heat ageing	(240h / 175°C)	no visual change or other damages	-
Tensile strength	LV 312-3 6.3.3	28,2	N
Flammability	FMVSS 302	class A	-
Oxygen index	EN 45545-2	39	%
Toxicity index	NF X 70-100	I.T.C = 10,96	-
Smoke density	EN 45545-2	Ds Max = 171	-
Smoke toxicity	EN 45545-2	CITNLP = 0,12	-