

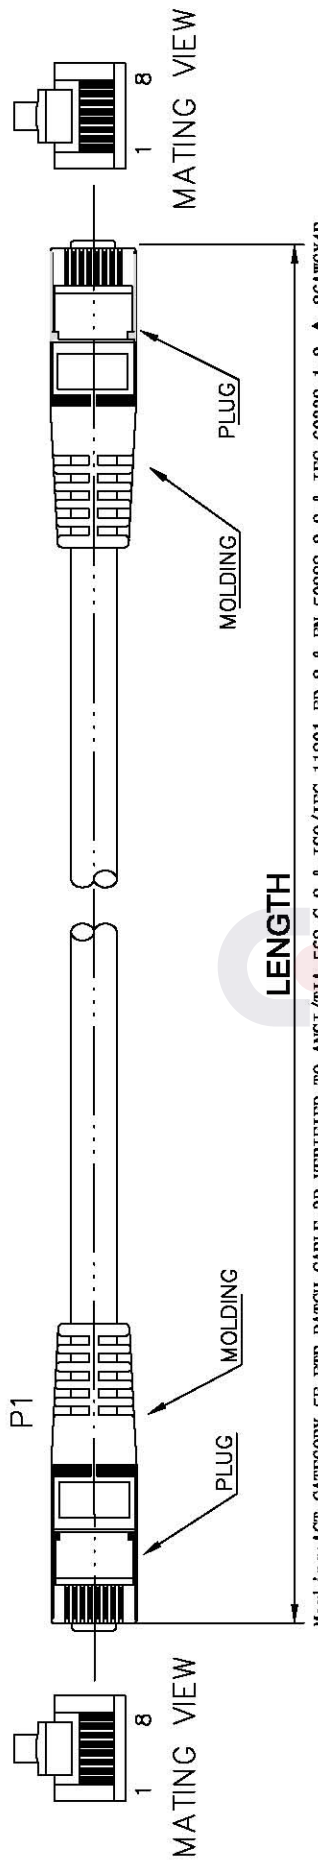


DATE	REV	DESCRIPTION	DT	BY
07/21	A/0	NEW	CAOWEN	YZG



Marking: ACT CATEGORY 5E FTP PATCH CABLE 3P VERIFIED TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-2-2 & IEC 60332-1-2 ▲ 26AWGX4P (UL) c(UL) CMH E164469-XX LEADFREE EN71 15000.001

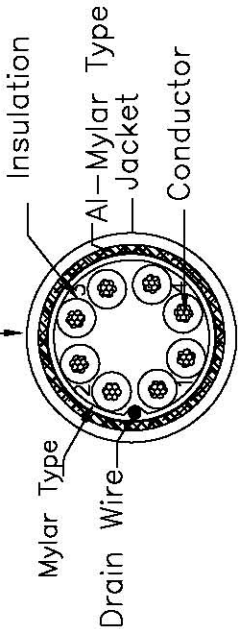

orange 2	green 3
white/orange	white/green
blue 1	brown 4
white/blue	white/brown

Conductor	Bare Copper 26AWG
Insulation	Thickness: MIN at any point: 0.15mm MAX AVG: 0.25mm Diameter: 0.88±0.06mm
Jacketing PVC	Thickness: MIN at any point: 0.50mm MAX AVG: 0.60mm Diameter: 5.6±0.2mm

ITEM NO.	Length
IB7100	0.5M
IB7101	1M
IB7102	2M
IB7103	3M
IB7105	5M
IB7107	7M
IB7110	10M
IB7115	15M
IB7120	20M
IB7225	25M
IB7151	1.5M

WIRE	CAT. 5E FTP STR 26AWG*4P		
PLUG	RJ45 8P8C		
LENGTH	0.5M, 1M, 1.5M, 2M, 3M, 5M, 7M, 10M, 15M, 20M, 25M		
WIRE COLOR	no.	item color	ral no.
	1	IB71XX	gray RAL9002
	2	IB72XX	ivory RAL1015

PA/R	PIN OUT		
	WIRE	P2 (T568B)	
2	1	WHT/ORG	1
	2	ORG	2
	3	WHT/GRN	3
3	6	GRN	6
	4	BLU	4
	5	WHT/BLU	5
1	7	WHT/BRN	7
	8	BRN	8



Unless specified on the drawing, tolerances are per the follows:

.X ± 1

.XX ± 0.2

.XX ± 0.05

3RD	MM	APPROVAL	DATE
		CHECKER	DATE
		DRAW	DATE
		ITEM	DATE

RoHS Compliant