

# LED Lamp

## LED LAMP CP22

COMPACT, HIGH EFFICIENCY ENCLOSURE LED LAMP WITH MOTION SENSOR

Fitted with Schuko socket and switch, it can be mounted with clips on DIN rail, on a bracket (ALFASTAFF) with screws or with magnetic fixing. It fits exactly one 19" height/unit (44 mm). Models LED LAMPSP22S and LED LAMPSP22S are fitted with motion sensor.



Features	Unit	LED LAMPSP22	LED LAMPSP22	LED LAMPSP22S	LED LAMPSP22S
Power supply*	V/Hz	100-230 VAC (±10%)/50-60			
Schuko socket	-	Yes 6A	No	Yes 6A	No
Luminosity	Lm	380			
Lamp type	-	LED			
Power consumption	W	5			
Service life	hrs	60 000			
Switch	-	On/Off for the lamp only		Motion sensor	
Connection	-	3-pole terminal for 1.5 mm <sup>2</sup> wire			
Casing	-	Aluminium profile and ABS, UL94 V0, light grey			
Protection degree EN60529	-	IP20			
Protection class	-	Class I, earthed			
Operating temperature	°C(°F)	-20/+60 (-4/+140)			
Storage temperature	°C(°F)	-40/+80 (-40/+176)			
Mounting	-	Clip on DIN rail, magnet or bracket, see ordering code below			
Installation position	-	variable			
Dimensions HxWxD	mm	95x43x277			
Weight (with packaging)	kg	0.42(0.49)			
Package dimensions HxWxD	mm	105x58x310			
Conformity/Certifications	-	CE			


\* DC voltage on request

### Versions

Clip mounting on DIN rail - Code ending	model code+CLIP	model code+CLIP
Magnet mounting	model code+MAGN	model code+MAGN
Bracket mounting	model code+STAF	model code+STAF

### Accessories

Bracket for lamp	ALFASTAFF	ALFASTAFF
Magnet for lamp	ALFAMAGNETE	ALFAMAGNETE
Door limit switch without block	FINCOR	FINCOR
Door limit switch	FINRIP	FINRIP
Safety flashing device with lamp switch	FSL	FSL
Safety flashing device with lamp and auxiliary switches	FSLA	FSLA

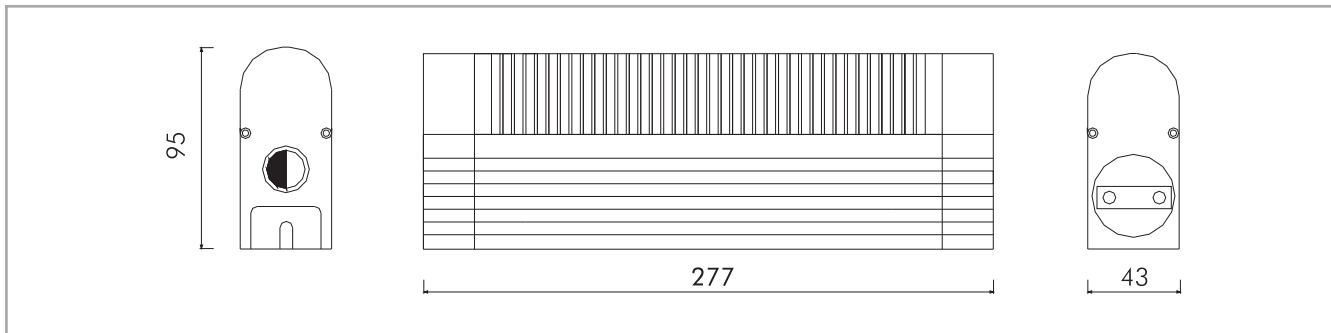

Specifications, values and drawings are subject to change without notice.