




Aderendhülsen für Leiter mit stärkerer Isolation - Typ GB Einzelbeutel

Wire end sleeves for wires with thick insulation - Type GB Single bag



Material: Kupfer / Polypropylen
Material: Copper / Polypropylene

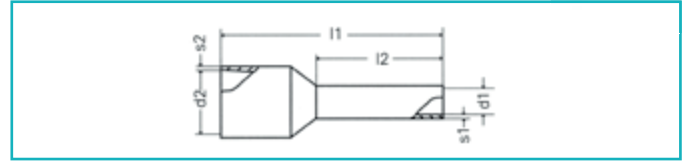

Oberfläche: verzinkt
Surface: Tin plated

Querschnitt Size	Länge Length	AWG	Art. Nr.		Code		Art. Nr.		Menge Quantity	Abmessungen Dimensions					
			Part No.	Code DIN	Part No.	Code T	Part No.	Code W		l1	l2	d1	s1	d2	s2
0,5	8	20	005610	WH	005610	WH	005620	OG	500	14,5	8	1,1	0,15	2,9	0,3
	10		005628		005628		007126			16,5	10				
0,75	8	18	005659	GY	005648	BU	005671	WH	500	14	8	1,3	0,15	3,3	0,3
	10		005686		005680		005692			16	10				
	12		005702		007117		007119			18	12				
1	8	18	005719	RD	005719	RD	005729	YE	500	14	8	1,5	0,15	3,3	0,3
	10		005739		005739		007122			16	10				
	12		005749		005749		005753			18	12				
1,5	6	16	007128	BK	007128	BK	007130	RD	500	12	6	1,8	0,15	3,7	0,3
	8		005766		005766		005778			14	8				
	10		005792		005792		007134			16	10				
2,5	8	14	005822	BU	005812	GY	005822	BU	500	16	8	2,3	0,15	4,7	0,3
	10		007137		005832		007137			18	10				
	12		007140		005838		007140			20	12				
4	10	16	007740	GY	007740	GY	007740	GY	500	18	10	2,9	0,2	6,1	0,3
	12		007742		007742		007742			20	12				
16	12	6	005926	BU	005920	WH	005933	GN	100	23	12	6	0,2	9,4	0,5
	18		005945		005941		005949			29	18				

Minibeutel / Mini bag

Querschnitt Size	Länge Length	AWG	Art. Nr.		Code		Art. Nr.		Menge Quantity	Abmessungen Dimensions					
			Part No.	Code DIN	Part No.	Code T	Part No.	Code W		l1	l2	d1	s1	d2	s2
0,5	8	20	005609	WH	005609	WH	005619	OG	10 x 100	14	8	1,1	0,15	2,9	0,3
	10		005627		005627		007125			16	10				
0,75	8	18	005658	GY	005647	BU	005670	WH	10 x 100	14	8	1,3	0,15	3,3	0,3
	10		005685		005679		005691			16	10				
	12		005701		007116		007118			18	12				
1	8	18	005718	RD	005718	RD	005728	YE	10 x 100	14	8	1,5	0,15	3,3	0,3
	10		005738		005738		007121			16	10				
	12		005748		005748		005752			18	12				
1,5	6	16	007127	BK	007127	BK	007129	RD	10 x 100	12	6	1,8	0,15	3,7	0,3
	8		005765		005765		005777			14	8				
	10		005791		005791		007133			16	10				
2,5	8	14	005821	BU	005811	GY	005821	BU	10 x 100	16	8	2,3	0,15	4,7	0,3
	10		007137		005831		007137			18	10				
	12		007139		005837		007139			20	12				
4	10	16	007739	GY	007739	GY	007739	GY	10 x 100	18	10	2,9	0,2	6,1	0,3
	12		007741		007741		007741			20	12				
16	12	6	005925	BU	005919	WH	005932	GN	10 x 100	23	12	6	0,2	9,4	0,5
	18		005944		005940		005948			29	18				

Zertifikate: CSA (Aktenzeichen 2110332), verwendeter Kunststoff UL gelistet (Aktenzeichen E108112)
Certificates: CSA (File No. 2110332), Plastic is UL listed (File No. E108112)

Max. Temp.: 105°C
Max. Temp.: 105°C