




MAXX

Screwdrivers



12 Screwdrivers


Professional screwdrivers at a glance

- 14 MAXX 
- 24 MAXX Plus 
- 30 MAXX VDE 
- 36 MAXX VDE Slim 
- 40 MAXX voltage testers 
- 44 MAXXPRO Stainless 
- 48 MAXXPRO Nature 
- 52 MAXXPRO Women Line 

MAXX



Certified by the IGR as an "ergonomic product".
 WITTE MAXX screwdrivers have been extensively tested by the independent IGR Institute for Health and Ergonomics with regard to usability and ergonomics and have been successfully certified to DIN 33419 / EN ISO 15537.

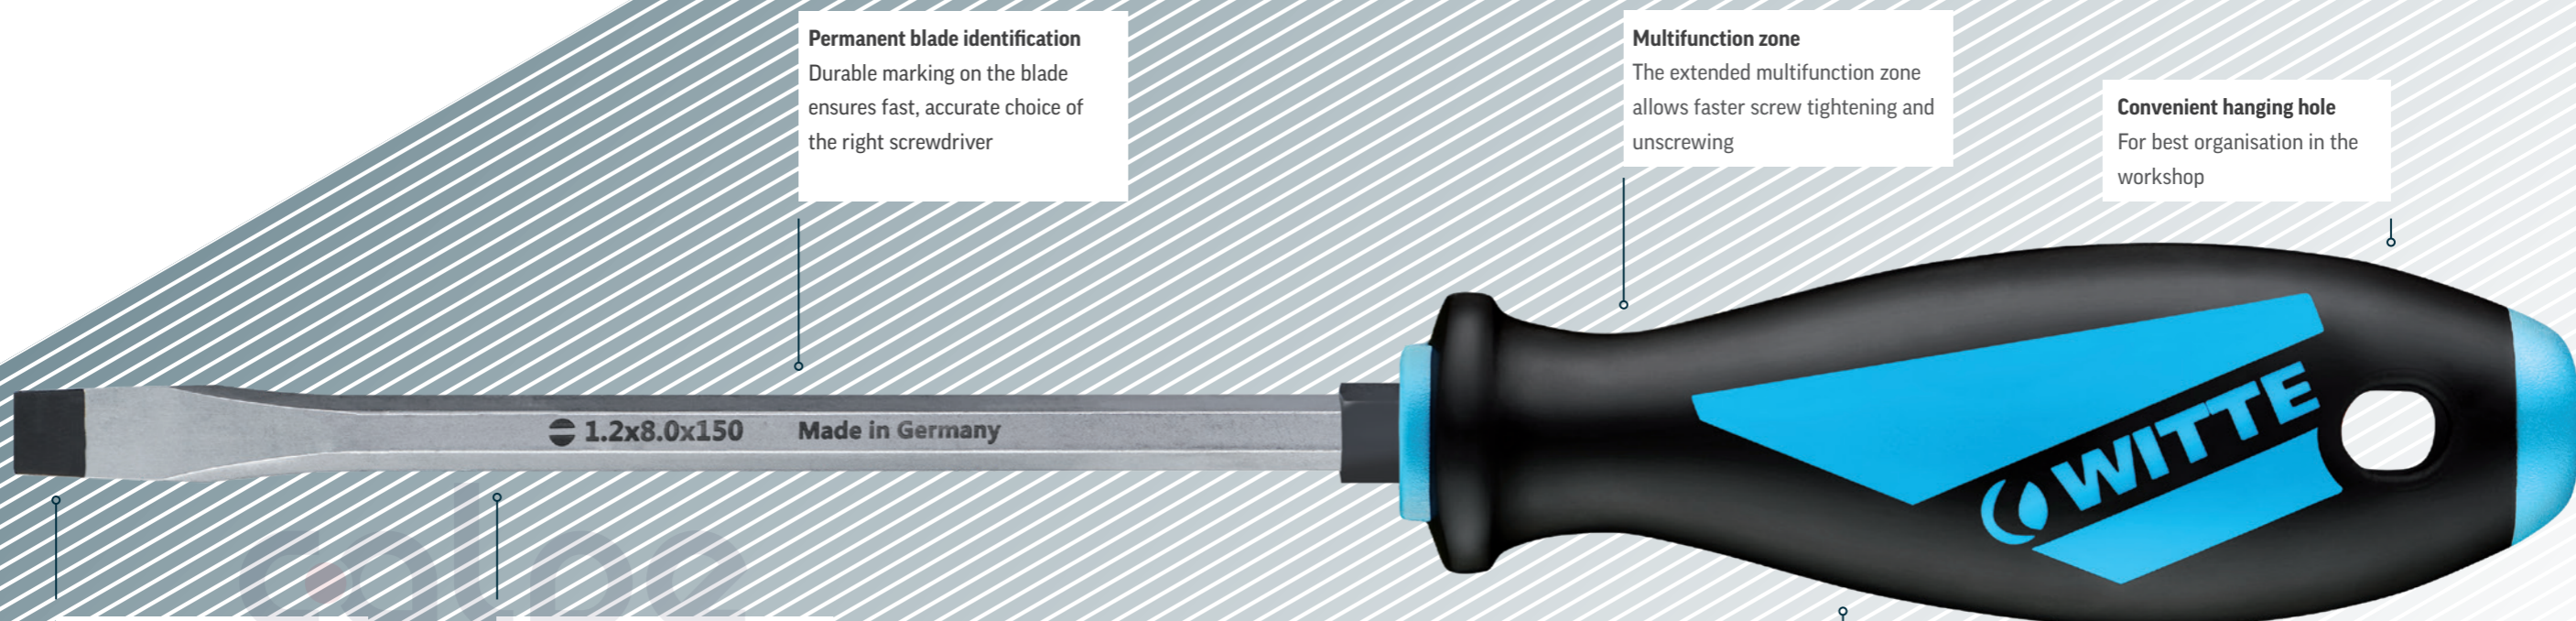

Permanent blade identification
 Durable marking on the blade ensures fast, accurate choice of the right screwdriver

Multifunction zone
 The extended multifunction zone allows faster screw tightening and unscrewing

Convenient hanging hole
 For best organisation in the workshop


Black tip
 Accurately finished tips provide peak protection against corrosion and guarantee accuracy and correct fit

High-grade steel that is made in Germany
 Hardened and tempered, extremely tough special steel guarantees optimum force transmission and long service lives

Soft component
 Enhance grip and provide better control of the tightening action

Ergonomically shaped triangular form
 Perfect ergonomic design for maximum force transmission

Demanding craftsmen and craftswomen need tools that do not make compromises: **MAXX**. The sculpted longitudinal contour of the ergonomically designed grips allows high axial forces to be applied to the screw without excessive effort. This generates high contact pressure while effectively preventing cam-out. The soft component on the edges of the grip supports a snug fit and helps to generate maximum torque.

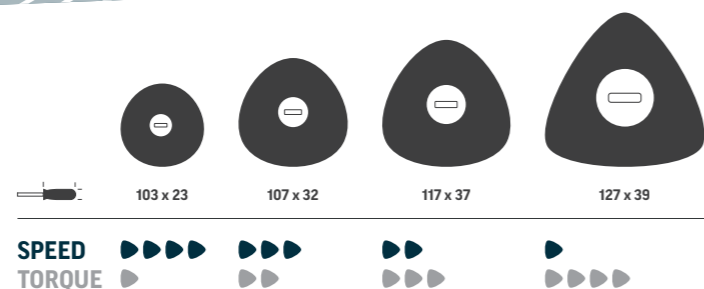


Exclusively available from WITTE: four handle sizes and shapes to match each size of screw head. Our grips are not merely "pinch zoomed" for the next size but individually shaped for the correct contour, centre of gravity and form.

The lower the required torque, the more round the grip cross-section to enable faster, accurate turns. The greater the required torque, the larger the grip, so it lies snugly in the hand and guarantees safe, accurate application of force.

The benefits

- Tried-and-tested three-sided shape corresponds to the hand's ideal tightening angle (120°)
- The spin zone made of softer material makes working with the tool faster and more satisfying
- Matt chrome-plated, permanently marked blades made of hardened and tempered special steel in all profiles
- Black tips guarantee peak accuracy and correct fit

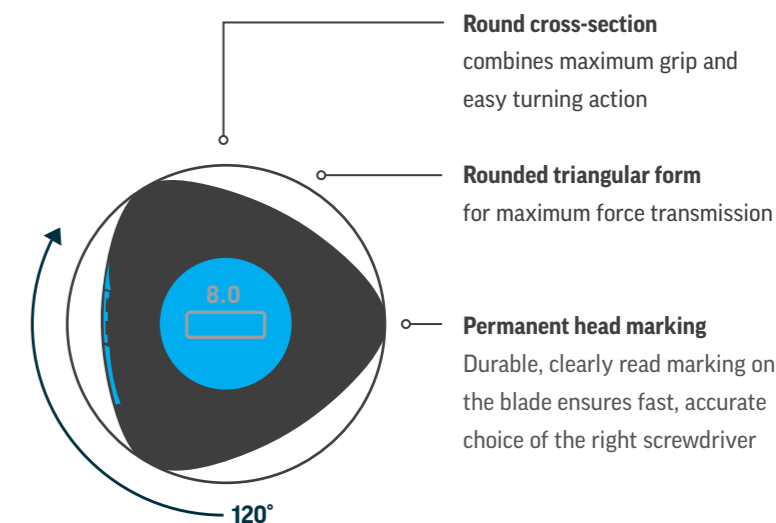

53100 slotted keystone/engineer's screwdrivers


to DIN 5264 and ISO 2380



ITEM NO.	mm	mm	mm	mm	ITEM NO.	mm	mm	mm	mm
53101	0.6 x 3.5	75	3.5	103 x 23	53107	1.2 x 6.5	125	6.0	117 x 37
53102	0.6 x 3.5	100	3.5	103 x 23	53108	1.2 x 6.5	150	6.0	117 x 37
53103	0.8 x 4.0	75	4.0	103 x 23	53109	1.2 x 8.0	150	7.0	127 x 39
53104	0.8 x 4.0	100	4.0	103 x 23	53110	1.6 x 8.0	175	7.0	127 x 39
53105	1.0 x 5.5	100	5.0	107 x 32	53111	1.6 x 10.0	200	8.0	127 x 39
53106	1.0 x 5.5	125	5.0	107 x 32					

53010 slotted keystone/engineer's screwdrivers


to DIN 5264 and ISO 2380, hexagonal blade and bolster dimensionally accurate to DIN 475



ITEM NO.	mm	mm	shank	mm	ITEM NO.	mm	mm	shank	mm		
53010	0.8 x 4.0	100	8.0	5.0	107 x 32	53014	1.6 x 10.0	200	13.0	8.0	127 x 39
53011	1.0 x 5.5	125	8.0	5.0	107 x 32	53015	2.0 x 12.0	225	-	10.0	127 x 39
53012	1.2 x 6.5	150	10.0	6.0	117 x 37	53016	2.5 x 14.0	275	-	10.0	127 x 39
53013	1.2 x 8.0	175	13.0	8.0	127 x 39						

53020 slotted cabinet / electrician's screwdrivers

to DIN 5264 and ISO 2380



ITEM NO.	mm	mm	mm	mm
53021	0.5 x 3.0	75	3.0	103 x 23
53022	0.6 x 3.5	100	3.5	103 x 23
53023	0.6 x 4.0	300	4.0	103 x 23
53024	0.8 x 4.0	125	4.0	103 x 23
53025	1.0 x 5.5	150	5.5	107 x 32
53026	1.0 x 5.5	200	5.5	107 x 32
53027	1.0 x 5.5	300	5.5	107 x 32

53030 PH screwdrivers

to ISO 8764 for PHILLIPS recess screws



ITEM NO.		mm	mm	mm	ITEM NO.		mm	mm	mm
53031	PH 0	60	3.0	103 x 23	53036	PH 2	200	6.0	117 x 37
53032	PH 1	80	4.5	107 x 32	53037	PH 2	300	6.0	117 x 37
53034	PH 1	300	4.5	107 x 32	53038	PH 3	150	8.0	127 x 39
53035	PH 2	100	6.0	117 x 37	53039	PH 4	200	10.0	127 x 39
53033	PH 2	150	6.0	117 x 37					

53500 PH screwdrivers

to ISO 8764 for PHILLIPS recess screws, hexagonal blade and bolster dimensionally accurate to DIN 475



ITEM NO.		mm	mm	shank	mm
53501	PH 1	105	8.0	5.0	107 x 32
53502	PH 2	125	10.0	6.0	117 x 37
53503	PH 3	175	13.0	8.0	127 x 39

53040 PZ screwdrivers

to ISO 8764 for POZIDRIV screws



ITEM NO.		mm	mm	mm	ITEM NO.		mm	mm	mm
53041	PZ 0	60	3.0	103 x 23	53047	PZ 2	300	6.0	117 x 37
53042	PZ 1	80	4.5	107 x 32	53048	PZ 3	150	8.0	127 x 39
53044	PZ 1	300	4.5	107 x 32	53049	PZ 4	200	10.0	127 x 39
53045	PZ 2	100	6.0	117 x 37					

53600 PZ screwdrivers

to ISO 8764 for POZIDRIV screws, hexagonal blade and bolster dimensionally accurate to DIN 475



ITEM NO.		mm	mm	shank	mm
53601	PZ 1	105	8.0	5.0	107 x 32
53602	PZ 2	125	10.0	6.0	117 x 37
53603	PZ 3	175	13.0	8.0	127 x 39


53200 TORX® screwdrivers



ITEM NO.		mm	mm	mm	ITEM NO.		mm	mm	mm
53201	T 5	60	3.0	103 x 23	53208	T 20	100	4.5	107 x 32
53202	T 6	60	3.0	103 x 23	53209	T 25	100	4.5	107 x 32
53203	T 7	60	3.0	103 x 23	53210	T 27	115	6.0	117 x 37
53204	T 8	60	3.0	103 x 23	53211	T 30	115	6.0	117 x 37
53205	T 9	60	3.0	103 x 23	53212	T 40	115	7.0	127 x 39
53206	T 10	80	3.5	103 x 23	53213	T 45	130	8.0	127 x 39
53207	T 15	80	3.5	103 x 23					


53300 TORX® screwdrivers

with central bore, TR tamper resistant



ITEM NO.			mm	mm	mm	ITEM NO.			mm	mm	mm
53303	TR 7		60	3.0	103 x 23	53309	TR 25		100	4.5	107 x 32
53304	TR 8		60	3.0	103 x 23	53310	TR 27		115	6.0	117 x 37
53305	TR 9		60	3.0	103 x 23	53311	TR 30		115	6.0	117 x 37
53306	TR 10		80	3.5	103 x 23	53312	TR 40		115	7.0	127 x 39
53307	TR 15		80	3.5	103 x 23	53313	TR 45		130	8.0	127 x 39
53308	TR 20		100	4.5	107 x 32						

53050 ball-end hex screwdrivers



ITEM NO.			mm	mm
53051	3.0		100	103 x 23
53052	4.0		100	103 x 23
53053	5.0		100	107 x 32
53054	6.0		125	117 x 37
53055	8.0		150	127 x 39

53060 square drive screwdrivers

for Robertson screws



ITEM NO.			mm	mm	mm
53061	1.0		100	4.5	107 x 32
53062	2.0		125	5.0	107 x 32
53063	3.0		150	6.0	117 x 37

53070 TRI-WING screwdrivers



ITEM NO.			mm	mm
53071	TW 2		80	107 x 32
53072	TW 3		100	107 x 32
53073	TW 4		100	107 x 32
53074	TW 5		100	107 x 32

53400 nutdrivers



ITEM NO.			mm	mm	ITEM NO.			mm	mm	ITEM NO.			mm	mm
53401	3.5		125	107 x 32	53406	6.0		125	117 x 37	53411	11.0		125	127 x 39
53402	4.0		125	107 x 32	53407	7.0		125	117 x 37	53412	12.0		125	127 x 39
53403	4.5		125	107 x 32	53408	8.0		125	117 x 37	53413	13.0		125	127 x 39
53404	5.0		125	107 x 32	53409	9.0		125	117 x 37	53414	14.0		125	127 x 39
53405	5.5		125	107 x 32	53410	10.0		125	117 x 37	53415	17.0		125	127 x 39

53080 nutdrivers


with flexible shank



ITEM NO.			mm	mm	ITEM NO.			mm	mm
53081	5.0		210	117 x 37	53084	7.0		210	117 x 37
53082	5.5		210	117 x 37	53085	8.0		210	117 x 37
53083	6.0		210	117 x 37	53086	1/4"		210	117 x 37

53091 bitholder

with 150 mm blade and permanent magnet



ITEM NO.			mm	mm
53091	1/4"		150	117 x 37

86990 slotted stubby screwdriver



ITEM NO.			mm	mm	mm	ITEM NO.			mm	mm	mm
86991	0.8 x 4.5		25	4.5	55 x 29	86993	1.2 x 8.0		25	8.0	55 x 29
86992	1.0 x 6.0		25	6.0	55 x 29						

94260 PH stubby screwdriver

to ISO 8764 for PHILLIPS recess screws



ITEM NO.			mm	mm	mm
94261	PH 1		25	4.5	55 x 29
94262	PH 2		25	6.0	55 x 29