

MAXX

Extra-hard bits



Extra-hard bits for low and uniformly increasing torques

WITTE extra-hard industrial bits are particularly well suited to fastener tightening at low, but steadily increasing torques during which large amounts of wear & tear occur, such as during cam-out. The special hardness of 62-64 HRC guarantees long service lifetimes.

PH for PHILLIPS recess screws



Extra hard
DIN ISO1173



Extra hard, truncated tip
DIN ISO1173

ITEM NO.	+	mm	1/4" drive
27120	PH 1	25	C6.3
27121	PH 2	25	C6.3
27122	PH 3	25	C6.3

ITEM NO.	+	mm	1/4" drive
27123	PH 2	25	C6.3

PZ for POZIDRIV screws



Extra hard
DIN ISO1173




Extra hard, truncated tip
DIN ISO1173

ITEM NO.	+	mm	1/4" drive
27245	PZ 1	25	C6.3
27246	PZ 2	25	C6.3
27247	PZ 3	25	C6.3

ITEM NO.	+	mm	1/4" drive
27248	PZ 2	25	C6.3

MAXX TIN bits

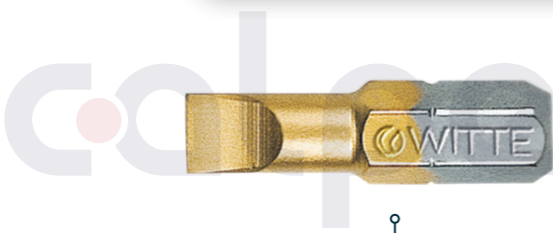

Optimum resistance to wear thanks to very hard titanium nitride (TIN) coating

The titanium nitride coating on the bits has a hardness of approx. 2800 HV and is ideally suited to screw-tightening sequences.

Thanks to the longer lifetimes and much reduced retooling times, there are considerable saving effects here.

PH for PHILLIPS recess screws



DIN ISO1173

ITEM NO.	+	mm	1/4" drive
28421	PH 1	25	6.3 mm
28422	PH 2	25	6.3 mm
28423	PH 3	25	6.3 mm

ITEM NO.	+	mm	1/4" drive
27320	PH 1	25	C6.3
27321	PH 2	25	C6.3
27322	PH 3	25	C6.3



DIN ISO1173

ITEM NO.	+	mm	1/4" drive
27551	PH 1	50	E6.3
27552	PH 2	50	E6.3
27553	PH 3	50	E6.3

PZ for POZIDRIV screws



DIN ISO1173

ITEM NO.	+	mm	1/4" drive
28445	PZ 1	25	6.3 mm
28446	PZ 2	25	6.3 mm
28447	PZ 3	25	6.3 mm

ITEM NO.	+	mm	1/4" drive
27345	PZ 1	25	C6.3
27346	PZ 2	25	C6.3
27347	PZ 3	25	C6.3



DIN ISO1173

ITEM NO.	+	mm	1/4" drive
27541	PZ 1	50	E6.3
27542	PZ 2	50	E6.3
27543	PZ 3	50	E6.3

Slotted



DIN ISO1173



DIN ISO1173

ITEM NO.	mm	mm	1/4" drive
26431	0.6 x 4.5	25	C6.3
26432	0.8 x 5.5	25	C6.3
26434	1.2 x 6.5	25	C6.3

ITEM NO.	mm	mm	1/4" drive
27531	0.6 x 4.5	50	E6.3
27532	0.8 x 5.5	50	E6.3
27534	1.2 x 6.5	50	E6.3

TORX®

ITEM NO.	Symbol	mm	1/4" drive	ITEM NO.	Symbol	mm	1/4" drive
29513	T 10	25	C6.3	29613	T 10	50	E6.3
29514	T 15	25	C6.3	29614	T 15	50	E6.3
29515	T 20	25	C6.3	29615	T 20	50	E6.3
29516	T 25	25	C6.3	29616	T 25	50	E6.3
29517	T 27	25	C6.3	29617	T 27	50	E6.3
29518	T 30	25	C6.3	29618	T 30	50	E6.3
29519	T 40	25	C6.3	29619	T 40	50	E6.3

TORX® TAMPER RESISTANT

ITEM NO.	Symbol	mm	1/4" drive
29593	TR 10	25	C6.3
29594	TR 15	25	C6.3
29595	TR 20	25	C6.3
29596	TR 25	25	C6.3
29597	TR 27	25	C6.3
29598	TR 30	25	C6.3
29599	TR 40	25	C6.3

PH for PHILLIPS recess screws

ITEM NO.	Symbol	mm	1/4" drive
27324	PH 1	25	C6.3
26708	PH 2	25	C6.3
27326	PH 3	25	C6.3

PZ for POZIDRIV screws

ITEM NO.	Symbol	mm	1/4" drive
26661	PZ 1	25	C6.3
26662	PZ 2	25	C6.3
26663	PZ 3	25	C6.3



Article may deviate from illustration



Article may deviate from illustration

PH for PHILLIPS recess screws

ITEM NO.	Symbol	Qty	mm	1/4" drive
427320	PH 1	10	25	C6.3
427321	PH 2	10	25	C6.3
427322	PH 3	10	25	C6.3

PZ for POZIDRIV screws

ITEM NO.	Symbol	Qty	mm	1/4" drive
427345	PZ 1	10	25	C6.3
427346	PZ 2	10	25	C6.3
427347	PZ 3	10	25	C6.3

PH BITFLEX for PHILLIPS recess screws

ITEM NO.	Symbol	mm	1/4" drive
26795	PH 1	25	6.3 mm
26796	PH 2	25	6.3 mm
26797	PH 3	25	6.3 mm

1 unit on a blister card

PZ BITFLEX for POZIDRIV screws

ITEM NO.	Symbol	mm	1/4" drive
26825	PZ 1	25	6.3 mm
26826	PZ 2	25	6.3 mm
26827	PZ 3	25	6.3 mm

1 unit on a blister card




Article may deviate from illustration



Article may deviate from illustration



Article may deviate from illustration



Article may deviate from illustration

