




ALFATORR14


ROOF FAN

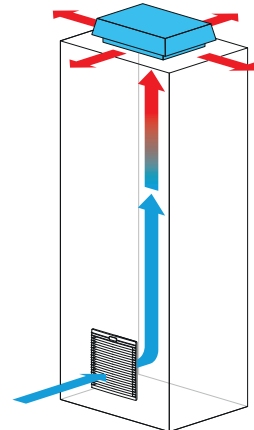

IP44		ALFATORRMETB	ALFATORR1450B	ALFATORR1451B
Air flow rate, free blow	m ³ /h	-	1500 / 1550	
Air flow rate with inlet filter	m ³ /h	-	900 / 950	
IP54		ALFATORRMETBF	ALFATORR1450BF	ALFATORR1451BF
Air flow rate, free blow	m ³ /h	-	1200 / 1240	
Air flow rate with inlet filter	m ³ /h	-	720 / 760	
Power supply	V ph Hz	-	230 1 50/60	115 1 50/60
Dimensions WxDxH	IP44	mm	540x390x128	
	IP54		540x390x150	
Power consumption	W	-	160 / 215	
Current consumption	A	-	0.70 / 0.98	1.40 / 1.96
Overcurrent protection	-	-	Thermal	
Electrical connection	-	-	3-pole terminal	
Duty cycle	-	-	100%	
Operating temperature	°C (°F)	-20 / +50 (-4 / +122)		
Protection class	-	-	Class I	
Noise level	dB (A)	-	74 / 75	
Flow direction	-	-	Inside-out	
Bearing	-	-	Ball	
Service life (at 40°C)	hrs	-	50 000	
Material	-	Sheet steel powder coated RAL7035		
Gasket	-	Self-adhesive		
Weight (with packaging)	kg	5.2 (5.5)	11.3 (12.3)	
Package dimensions	mm	550x400x140		
Mounting	-	Screws		
Conformity/Certifications	-	CE		

Accessories

Thermostat 0-60°C, NO contact	THV2
Inlet filter	ATV5000
Spare filter mat (for IP54 version)	ALFAFT15
Fan speed controller	FSCI

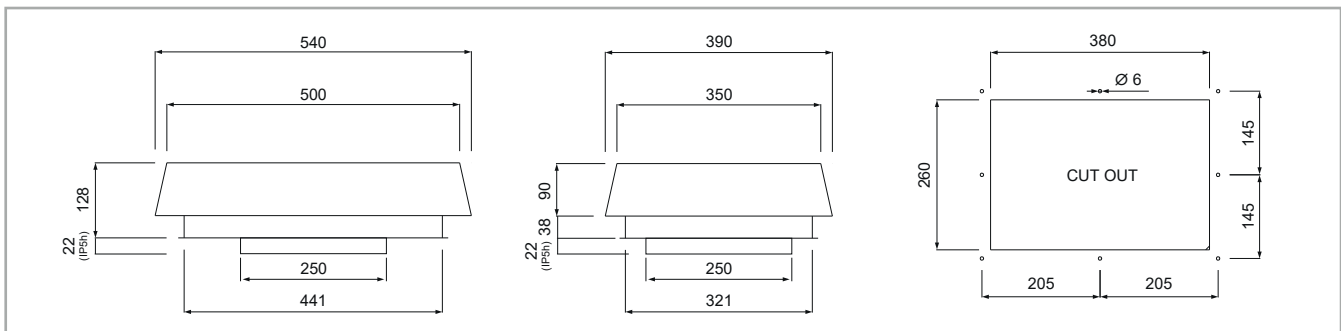

Specifications, values and drawings are subject to change without notice.