



Heaters 25-150W

HT.001


COMPACT PTC HEATERS WITH INTEGRATED THERMOSTAT FIXED SET

Compact PTC heaters series with minimum DIN rail foot-print. Terminal connection. Integrated thermostat fixed set.



FEATURES	Unit	HT25.001	HT50.001	HT75.001	HT100.001	HT150.001
Heating Capacity*	W	25	50	75	100	150
Power supply	V	120-240V AC/DC				
Switch on / switch off temp.	°C (°F)	+5 / +15 (+41 / +59)				
Inrush current	A	2.5	3.5	4	5	9.5
Delayed fuse (advised)	A	4	4	6.3	8	10
Heating element type	-	PTC resistor, self-regulation				
Electrical connections	-	screw terminals for stranded or rigid wire 2.5 mm²				
Protection class	-	Class II				
Protection degree EN60529	-	IP20				
Operating temperature	°C (°F)	-45 / +70 (-49 / +158)				
Storage temperature	°C (°F)	-45 / +80 (-49 / +176)				
Radiator	-	Extruded aluminium profile				
Mounting	-	Clip for mounting on DIN rail 35 mm EN50022				
Installation position	-	Best efficiency in vertical position				
Dimensions HxWxD	mm	128x61x59		153x61x59		232x61x59
Weight (with packaging)	Kg	0.26 (0.29)		0.33 (0.37)		0.58 (0.63)
Conformity/Certification	-	CE				

*at 10°C (50°F) ambient temperature

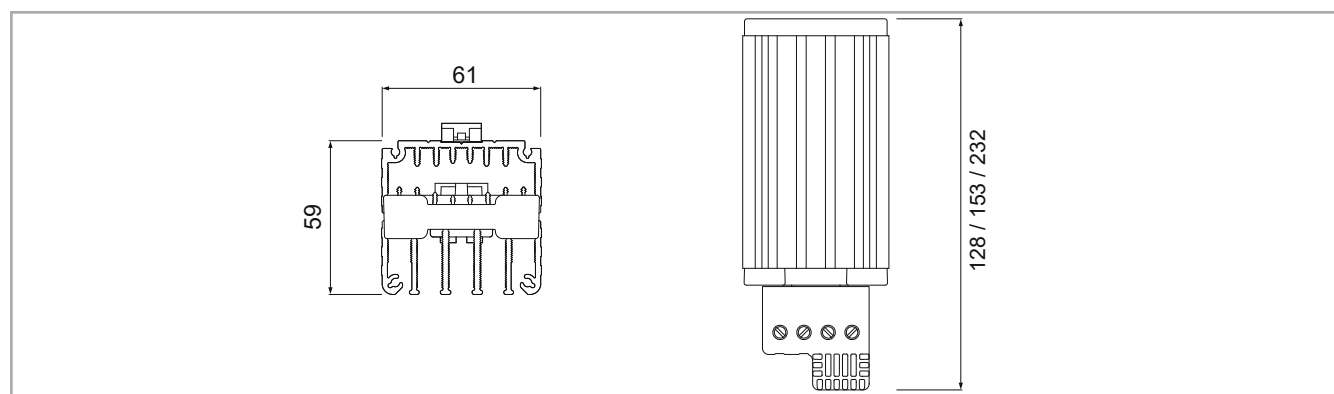

Specifications, values and drawings are subject to change without notice.

